Noise Monitor Data Newport


This report provides a summary of the aircraft noise data collected from 1 July, 2025 to 30 September, 2025 inclusive.

Melbourne Airport installed four new portable noise monitors in 2025 to increase and improve the data available for residents about aircraft noise around the airport. The installation of these monitors is a direct response to community feedback received during the 2022 public exhibition of Melbourne Airport's Third Runway Major Development Plan. The monitors provide the public with accurate measurements of overhead flight noise.

The relocatable noise monitors were positioned in Keilor, St Albans, Diggers Rest and Newport and supplement the six permanent noise monitors already located in nearby suburbs (see below).

The portable noise monitors linked directly to Airservices Australia's Webtrak system allowing anyone to access the data online in almost real time.

Data presented in this report covers the maximum noise level detected for an aircraft event.

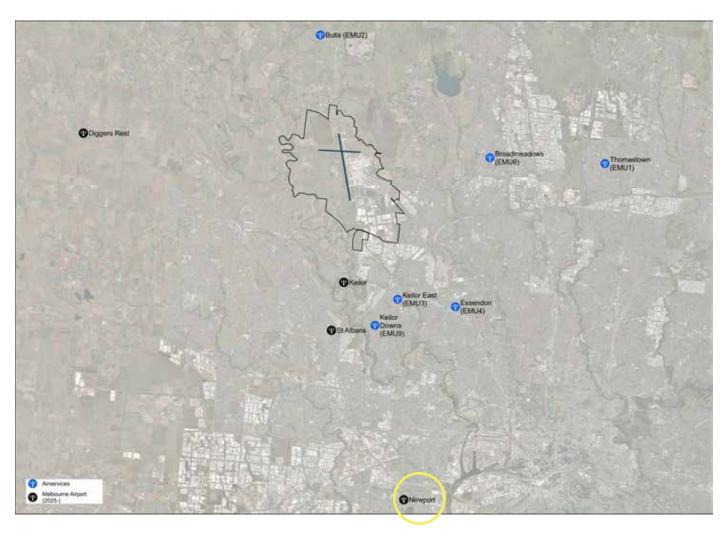

Visit www.melbourneairportprojectshub.com.au


Noise scale

Sound is usually measured in decibels (dB). Aircraft noise is measured in decibels adjusted, which is A-weighted decibels or dB(A). This means decibels have been adjusted to reflect our ear's response to different frequencies of sound.

The scale below explains noise in the context of common experiences. It describes the noise modelled 3,600

metres south of Melbourne Airport's third runway, at the intersection of the Calder Freeway and Green Gully Rd, for:

- narrow-body¹ jet arrivals and departures (typically serving domestic routes)
- wide-body² jet arrivals and departures (typically serving international routes)

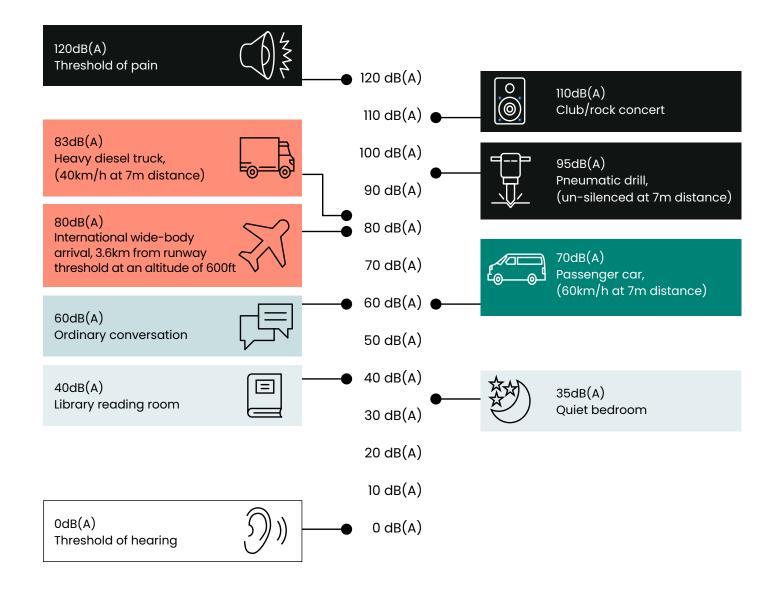

< 60 60-65 dB(A)	65-70 70-75	75-80 80-85	85-90	> 90
	dB(A) dB(A)	dB(A) dB(A)	dB(A)	IB(A)

Source: APAM and NASF Guideline A: Attachment 1


^{*3.6}km is approximately the distance from Runway 34R threshold to the Calder Freeway. Aircraft noise values are based on modelling used in Melbourne Airport's Third Runway Major Development Plan.

^{1&#}x27;Narrow-body' refers to aircraft that have one passenger aisle. Examples include Boeing 737 and Airbus A320 fleets.

^{2 &#}x27;Wide-body' refers to aircraft that have two passenger aisles. Examples include Boeing 787 and Airbus A380 fleets.

Aircraft movements

Below are the number of aircraft movements captured by the Newport monitor by operation (arrivals/departures) and runway from 1 July 2025 to 30 September 2025.



Arrivals					
Runway 16	2				
Runway 34	7,491				
Runway 09	-				
Runway 27	2				
Runway 16/34	7,493				
Runway 09/27	2				

Departures					
Runway 16	216				
Runway 34	-				
Runway 09	-				
Runway 27	0				
Runway 16/34	216				
Runway 09/27	9				

N-above noise events

One way to describe aircraft-noise impacts is by the number of noise events that exceed a certain level. These metrics are referred to as 'N-above' (as in, number above) contour levels.

It aims to provide information in a form that is better understood by the public. It does this by providing a description of aircraft noise exposure at a given location and time period. The National Airports Safeguarding Framework (NASF) Guideline A: Measure for Managing

Impacts of Aircraft Noise, recommends the use of N-contours for strategic planning purposes.

The data collected from the Newport noise monitor is presented in the N-above format below, indicating the average number of events during the recorded period.

For example, on average there were 0 daily departure events above 70dB and 74 daily arrival events above 60dB.

		Arrival Events	Departure Events	Total Events
N60 24hr	N60 24 hours provides the number of events at or above 60dB(A) over a 24-hour period	74	2	76
N70 24hr	N70 24 hours provides the number of events at or above 70dB(A) over a 24-hour period	3	-	3
N60 night	N60 night provides the number of events at or above 60dB(A) over the night period (11pm to 6am)	12	-	12

Aircraft noise can be different for arrivals and departures. The following pages provide information broken down by operation (arrival and departures).


Arrivals

Noise results from the 7,496 arrivals collected during the recorded dates have been allocated into noise level 'groups' and by periods of the day.

Graph below highlights the number of arrivals d by noise level group.

For example, there were:

- 4,115 arrivals detected between 60-65dB(A)
- 8 arrivals detected between 75-80dB(A)

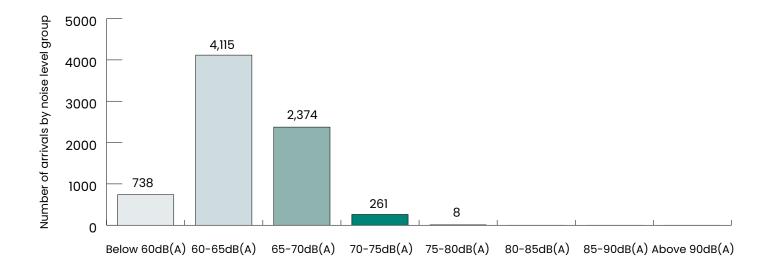

The number of arrivals by noise level group and time of day are highlighted below.

For example, there were:

- 1,324 arrivals detected between 60-65dB(A) in the Morning (6am-1pm)
- 2 arrivals detected between 75-80dB(A) in the Night (11pm-6am)

	< 60 dB(A)	60-65 dB(A)	65-70 dB(A)	70-75 dB(A)	75-80 dB(A)	80-85 dB(A)	85-90 dB(A)	> 90 dB(A)
Morning 6am-1pm	147	1,324	921	116	4	-	-	-
Afternoon 1pm-5pm	148	931	432	45	-	-	-	-
Evening 5pm-11pm	262	1,163	648	50	2	-	-	-
Night 11pm-6am	181	697	373	50	2	-	-	-
TOTAL	738	4,115	2,374	261	8	-	-	-




Below highlights the number of arrivals during the recored dates by aircraft type groups along with the highest, lowest and median noise level events.

For example, there was:

- 4,221 narrow-body (older gen) arrival with a median noise level of 63.5dB(A)
- 928 narrow-body (new gen) arrivals with a median noise level of 62.6dB(A)

Crouning	Example Aircraft Type	Number of arrivals	Maxium Noise Level dB(A)			
Grouping	Example All Craft Type		Highest	Median	Lowest	
Wide-body four engines	Airbus A380, Boeing 747	190	75.6	67.9	62.8	
Wide-body (older gen)	Boeing 777, Airbus A330	1,018	77.3	66.3	59.2	
Wide-body (new gen)	Airbus A350, Boeing 787, Airbus A330neo	879	73.6	63.6	55.3	
Narrow-body (older gen)	Airbus A321/A320, Boeing 737, Boeing 717, Embraer 190, BAe-146	4,221	73.6	63.5	56.2	
Narrow-body (new gen)	Airbus A321neo/A320neo, Boeing 737 MAX, Airbus A220	928	73.7	62.6	56.7	
Turboprops	Dash-8 Q400, Saab 340, Metroliner	227	73.6	61.5	54.4	
Other	Global Express, Cessna 172 etc.	33	68.7	62.2	54.4	

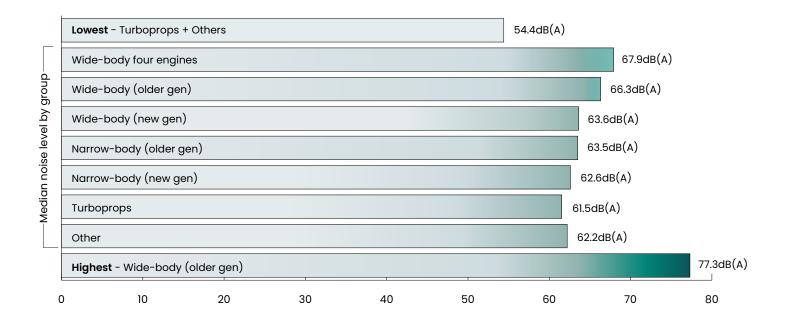


Departures

Noise results from the 228 departures collected during the recorded dates have been allocated into noise level 'groups' and by periods of the day.

Graph below highlights the number of departures by noise level group.

For example, there were:

- 93 departures detected between 60-65 dB(A)
- 6 departure detected between 70-75 dB(A)

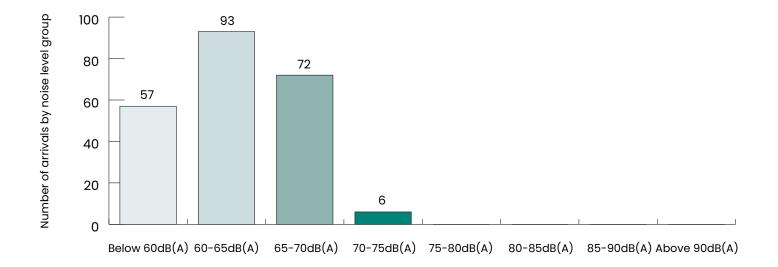

The number of departures by noise level group and time of day are highlighted below.

For example, there were:

- 30 departures detected between 60-65dB(A) in the Morning (6am-1pm)
- 0 departures detected between 70-75dB(A) in the Night (11pm-6am)

	< 60 dB(A)	60-65 dB(A)	65-70 dB(A)	70-75 dB(A)	75-80 dB(A)	80-85 dB(A)	85-90 dB(A)	> 90 dB(A)
Morning 6am-1pm	18	30	37	4	-	-	-	-
Afternoon 1pm-5pm	24	40	22	ı	-	-	-	-
Evening 5pm-11pm	15	15	11	2	-	-	-	-
Night 11pm-6am	-	8	2	-	-	-	-	-
TOTAL	57	93	72	6	-	-	-	-



Below highlights the number of departures during the recorded dates by aircraft type groups along with the highest, lowest and median noise level events.

For example, there was:

- 22 wide-body (older gen) departures with a median noise level of 65.8dB(A)
- 24 narrow-body (new gen) departure with a median noise level of 59.7dB(A)

Crouping	Example Aircraft Type	Number of arrivals	Maxium Noise Level dB(A)			
Grouping	ехипрів Анстин Турв		Highest	Median	Lowest	
Wide-body four engines	Airbus A380, Boeing 747	2	73.0	72.0	71.0	
Wide-body (older gen)	Boeing 777, Airbus A330	22	72.5	65.8	60.0	
Wide-body (new gen)	Airbus A350, Boeing 787, Airbus A330neo	37	70.8	65.3	56.7	
Narrow-body (older gen)	Airbus A321/A320, Boeing 737, Boeing 717, Embraer 190, BAe-146	98	70.0	64.4	54.8	
Narrow-body (new gen)	Airbus A321neo/A320neo, Boeing 737 MAX, Airbus A220	24	64.4	59.7	55.5	
Turboprops	Dash-8 Q400, Saab 340, Metroliner	41	67.3	58.5	54.5	
Other	Global Express, Cessna 172 etc.	4	72.8	64.0	56.1	

